

## P/N: 64501-0103

### Copyright

© 2015, FLIR Systems, Inc.

All rights reserved worldwide. Names and marks appearing herein are either registered trademarks or trademarks of FLIR Systems and/or its subsidiaries. All other trademarks, trade names or company names referenced herein are used for identification only and are the property of their respective owners.

### Document identity

Publ. No.: 64501-0103

Release:

Commit: 24597

Language: en-US

Modified: 2015-04-09

Formatted: 2015-04-10

### Corporate Headquarters

FLIR Systems, Inc.

27700 SW Parkway Ave.

Wilsonville, OR 97070

USA

Telephone: +1-503-498-3547

### Website

<http://www.flir.com>

### Customer support

<http://support.flir.com>

### Disclaimer

Specifications subject to change without further notice. Camera models and accessories subject to regional market considerations. License procedures may apply. Products described herein may be subject to US Export Regulations. Please refer to [exportquestions@flir.com](mailto:exportquestions@flir.com) with any questions.



### General description

The FLIR Exx series cameras are compact and rugged infrared cameras that can be used in harsh environments while still providing you with the latest technology such as a modern touch screen and wireless connectivity. A FLIR Exx series camera is the perfect choice when you are looking for a robust but feature-rich camera at an affordable price.

#### Benefits:

- Robust and sophisticated: The FLIR Exx series cameras have a robust and light-weight design and can withstand a 2 m drop. Large buttons combined with a modern touch screen and extensive measuring capabilities, they are the right choice for demanding inspections in the field.
- Easy communication: The Wi-Fi connectivity of the FLIR Exx series cameras allows you to connect to smart phones and tablets, for the wireless transfer of images or the remote control of the camera. The Bluetooth-based METERLiNK function transfers readings from external measurement instruments to the infrared image.
- Best value for money: The FLIR Exx series cameras combine good performance (up to 320 × 240 pixels), a user-friendly interface, and a rugged point-and-shoot design with an affordable price.

### Imaging and optical data

IR resolution	160 × 120 pixels
Thermal sensitivity/NETD	< 0.07°C @ +30°C (+86°F) / 70 mK
Field of view (FOV)	25° × 19°
Minimum focus distance	0.4 m (1.31 ft.)
Focal length	18 mm (0.7 in.)
Spatial resolution (IFOV)	2.72 mrad
F-number	1.3
Image frequency	60 Hz
Focus	Manual
Digital zoom	2×
Panning	Panning over zoomed-in images

### Detector data

Detector type	Focal plane array (FPA), uncooled microbolometer
Spectral range	7.5–13 μm

P/N: 64501-0103

© 2015, FLIR Systems, Inc.

#64501-0103; r. /24597; en-US

Image presentation	
Display	Touch screen, 3.5 in. LCD, 320 × 240 pixels
Image adjustment	Auto or manual
Image presentation modes	
Image modes	IR image, visual image, MSX, picture in picture, thumbnail gallery
Picture in Picture	IR area on visual image
Measurement	
Object temperature range	<ul style="list-style-type: none"> <li>• -20°C to +120°C (-4°F to +248°F)</li> <li>• 0°C to +650°C (+32°F to +1202°F)</li> </ul>
Accuracy	±2°C (±3.6°F) or ±2% of reading, for ambient temperature 10°C to 35°C (+50°F to 95°F)
Measurement analysis	
Spotmeter	3
Area	3 boxes with max./min./average
Automatic hot/cold detection	Auto hot or cold spotmeter markers within area
Difference temperature	Delta temperature between measurement functions or reference temperature
Reference temperature	Manually set or captured from any measurement function
Emissivity correction	Variable from 0.01 to 1.0 or selected from materials list
External optics/windows correction	Automatic, based on inputs of optics/window transmission and temperature
Measurement corrections	Reflected temperature, optics transmission and atmospheric transmission
Set-up	
Color palettes	Arctic, Gray, Iron, Lava, Rainbow and Rainbow HC
Set-up commands	Local adaptation of units, language, date and time formats
Storage of images	
Image storage	Standard JPEG, including measurement data, on memory card
Image storage mode	Simultaneous storage of images in IR, visual and MSX
Image annotations	
Text	Text from predefined list or soft keyboard on touch screen
Report generation	<ul style="list-style-type: none"> <li>• FLIR Tools software specifically designed to provide an easy way to create inspection reports. It is available on the major platforms – Android, Windows, MacOS, and iOS.</li> </ul>
Video recording in camera	
Non-radiometric IR video recording	MPEG-4 to memory card



## FLIR E40 with SC kit (incl. Wi-Fi and 45° lens)

P/N: 64501-0103

© 2015, FLIR Systems, Inc.

#64501-0103; r. /24597; en-US

Video streaming	
Radiometric IR video streaming	Full dynamic to PC using USB
Non-radiometric IR video streaming	Uncompressed colorized video using USB
Digital camera	
Built-in digital camera	3.1 Mpixels (2048 × 1536 pixels), and one LED light
Digital camera, focus	Fixed focus
Built-in digital lens data	FOV 53° × 41°
Digital camera, aspect ratio	4:3
Laser pointer	
Laser	Activated by dedicated button
Laser alignment	Position is automatic displayed on the IR image
Laser classification	Class 2
Laser type	Semiconductor AlGaInP diode laser
Laser power	1 mW
Laser wavelength	635 nm (red)
Data communication interfaces	
Wi-Fi	Peer-to-peer (ad hoc) or infrastructure (network)
SD Card	One card slot for removable SD memory cards
USB	
USB	<ul style="list-style-type: none"><li>• USB-A: Connect external USB device</li><li>• USB Mini-B: Data transfer to and from PC / uncompressed colorized video</li></ul>
USB, standard	USB Mini-B: 2.0
USB, connector type	<ul style="list-style-type: none"><li>• USB-A connector</li><li>• USB Mini-B connector</li></ul>
Composite video	
Video out	Composite
Video, standard	CVBS (ITU-R-BT.470 PAL/SMPTE 170M NTSC)
Video, connector type	4-pole 3.5 mm jack
Power system	
Battery type	Rechargeable Li ion battery
Battery voltage	3.7 V
Battery capacity	4.4 Ah, at +20°C to +25°C (+68°F to +77°F)
Battery operating time	Approx. 4 hours at +25°C (+77°F) ambient temperature and typical use
Charging system	In camera (AC adapter or 12 V from a vehicle) or 2-bay charger
Charging time	4 h to 90% capacity, charging status indicated by LED's
Charging temperature	0°C to +45°C (+32°F to +113°F)
Power management	Automatic shutdown and sleep mode (user selectable)

P/N: 64501-0103

© 2015, FLIR Systems, Inc.

#64501-0103; r. /24597; en-US

Power system	
AC operation	AC adapter, 90–260 VAC input, 12 V output to camera
Start-up time from sleep mode	Instant on
Environmental data	
Operating temperature range	–15°C to +50°C (+5°F to +122°F)
Storage temperature range	–40°C to +70°C (–40°F to +158°F)
Humidity (operating and storage)	IEC 60068-2-30/24 h 95% relative humidity +25°C to +40°C (+77°F to +104°F) / 2 cycles
EMC	<ul style="list-style-type: none"> <li>• EN 61000-6-2 (Immunity)</li> <li>• EN 61000-6-3 (Emission)</li> <li>• FCC 47 CFR Part 15 B (Emission)</li> </ul>
Magnetic fields	EN 61 000-4-8, Test level 5 for continuous field (severe industrial environment)
Encapsulation	IP 54 (IEC 60529)
Shock	25 g (IEC 60068-2-27)
Vibration	2 g (IEC 60068-2-6)
Drop	2 m (6.6 ft.)
Safety	EN/UL/CSA/PSE 60950-1
Physical data	
Camera weight, incl. battery	0.869 kg (1.91 lb.)
Camera size (L × W × H)	246 × 97 × 184 mm (9.7 × 3.8 × 7.2 in.)
Tripod mounting	UNC ¼"-20 (adapter needed)
Material	<ul style="list-style-type: none"> <li>• Polycarbonate + acrylonitrile butadiene styrene (PC-ABS)</li> <li>• Thixomold magnesium</li> <li>• Thermoplastic elastomer (TPE)</li> </ul>
Color	Graphite gray and black
Shipping information	
Packaging, type	Cardboard box
List of contents	<ul style="list-style-type: none"> <li>• Hard transport case</li> <li>• Infrared camera with lens</li> <li>• Battery</li> <li>• FLIR ResearchIR Standard 4</li> <li>• Handstrap</li> <li>• IR lens, f = 10 mm, 45° incl. case</li> <li>• Memory card</li> <li>• Power supply, incl. multi-plugs</li> <li>• Printed documentation</li> <li>• USB cable</li> <li>• User documentation CD-ROM</li> <li>• Video cable</li> </ul>
Packaging, weight	5.7 kg (12.6 lb.)
Packaging, size	630 × 190 × 370 mm (24.8 × 7.5 × 14.6 in.)
EAN-13	4743254001558
UPC-12	845188008932
Country of origin	Estonia

## Supplies & accessories:

- 1196961; IR lens, f = 30 mm, 15° incl. case

---



**P/N: 64501-0103**

© 2015, FLIR Systems, Inc.


#64501-0103; r. /24597; en-US

- 1196960; IR lens, f = 10 mm, 45° incl. case
- T910814; Power supply, incl. multi plugs
- T911230ACC; Memory card SDHC 4 GB
- 1910423; USB cable Std A <-> Mini-B
- T198509; Cigarette lighter adapter kit, 12 VDC, 1.2 m/3.9 ft.
- 1910582ACC; Video cable
- T911093; Tool belt
- T198125; Battery charger, incl. power supply with multi plugs (Exx, Kxx)
- T198113; IR lens, 76 mm (6°) with case and mounting support for Exx
- T198487; Li-Ion Battery pack 3.7V 17Wh
- T198484; Pouch for FLIR Exx series
- T198485; Sun shield
- T198341ACC; Transport case Exx
- T198486; Tripod Adapter
- 19250-100; IR Window 2 in
- 19251-100; IR Window 3 in.
- 19252-100; IR Window 4 in.
- 19250-200; SS IR Window 2 in.
- 19251-200; SS IR Window 3 in.
- 19252-200; SS IR Window 4 in.
- T198586; FLIR Reporter Professional (license only)
- T198584; FLIR Tools
- T198583; FLIR Tools+ (license only)
- DSW-10000; FLIR IR Camera Player
- T198697; FLIR ResearchIR Max + HSDR 4
- T199014; FLIR ResearchIR Max + HSDR 4
- T199044; FLIR ResearchIR Max + HSDR 4 Upgrade
- T198696; FLIR ResearchIR Max 4
- T199013; FLIR ResearchIR Max 4
- T199043; FLIR ResearchIR Max 4 Upgrade
- T198731; FLIR ResearchIR Standard 4
- T199012; FLIR ResearchIR Standard 4
- T199042; FLIR ResearchIR Standard 4 Upgrade

A technical line drawing of a 3D-printed mechanical component, possibly a camera lens mount or a similar optical assembly. The drawing shows a perspective view of the part, which has a complex, curved shape. A prominent feature is a large, circular opening in the center, which appears to be a lens element or a filter. The part is shown with various mounting points, including a small rectangular tab on the side and a larger, curved bracket-like structure. The drawing is a black and white line art, typical of technical illustrations.

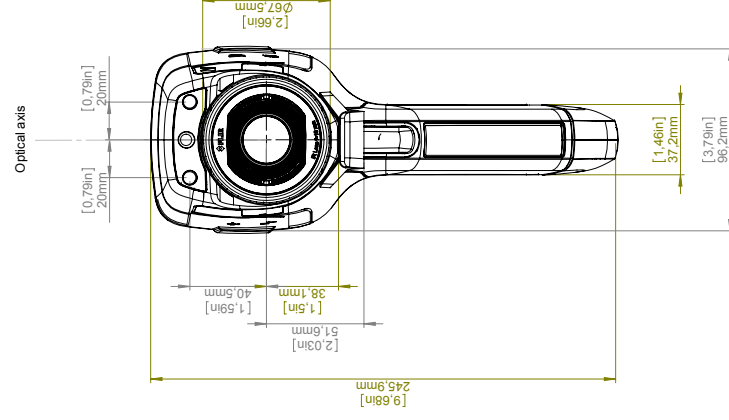

Camera with Lens IR f=10 mm (45°)

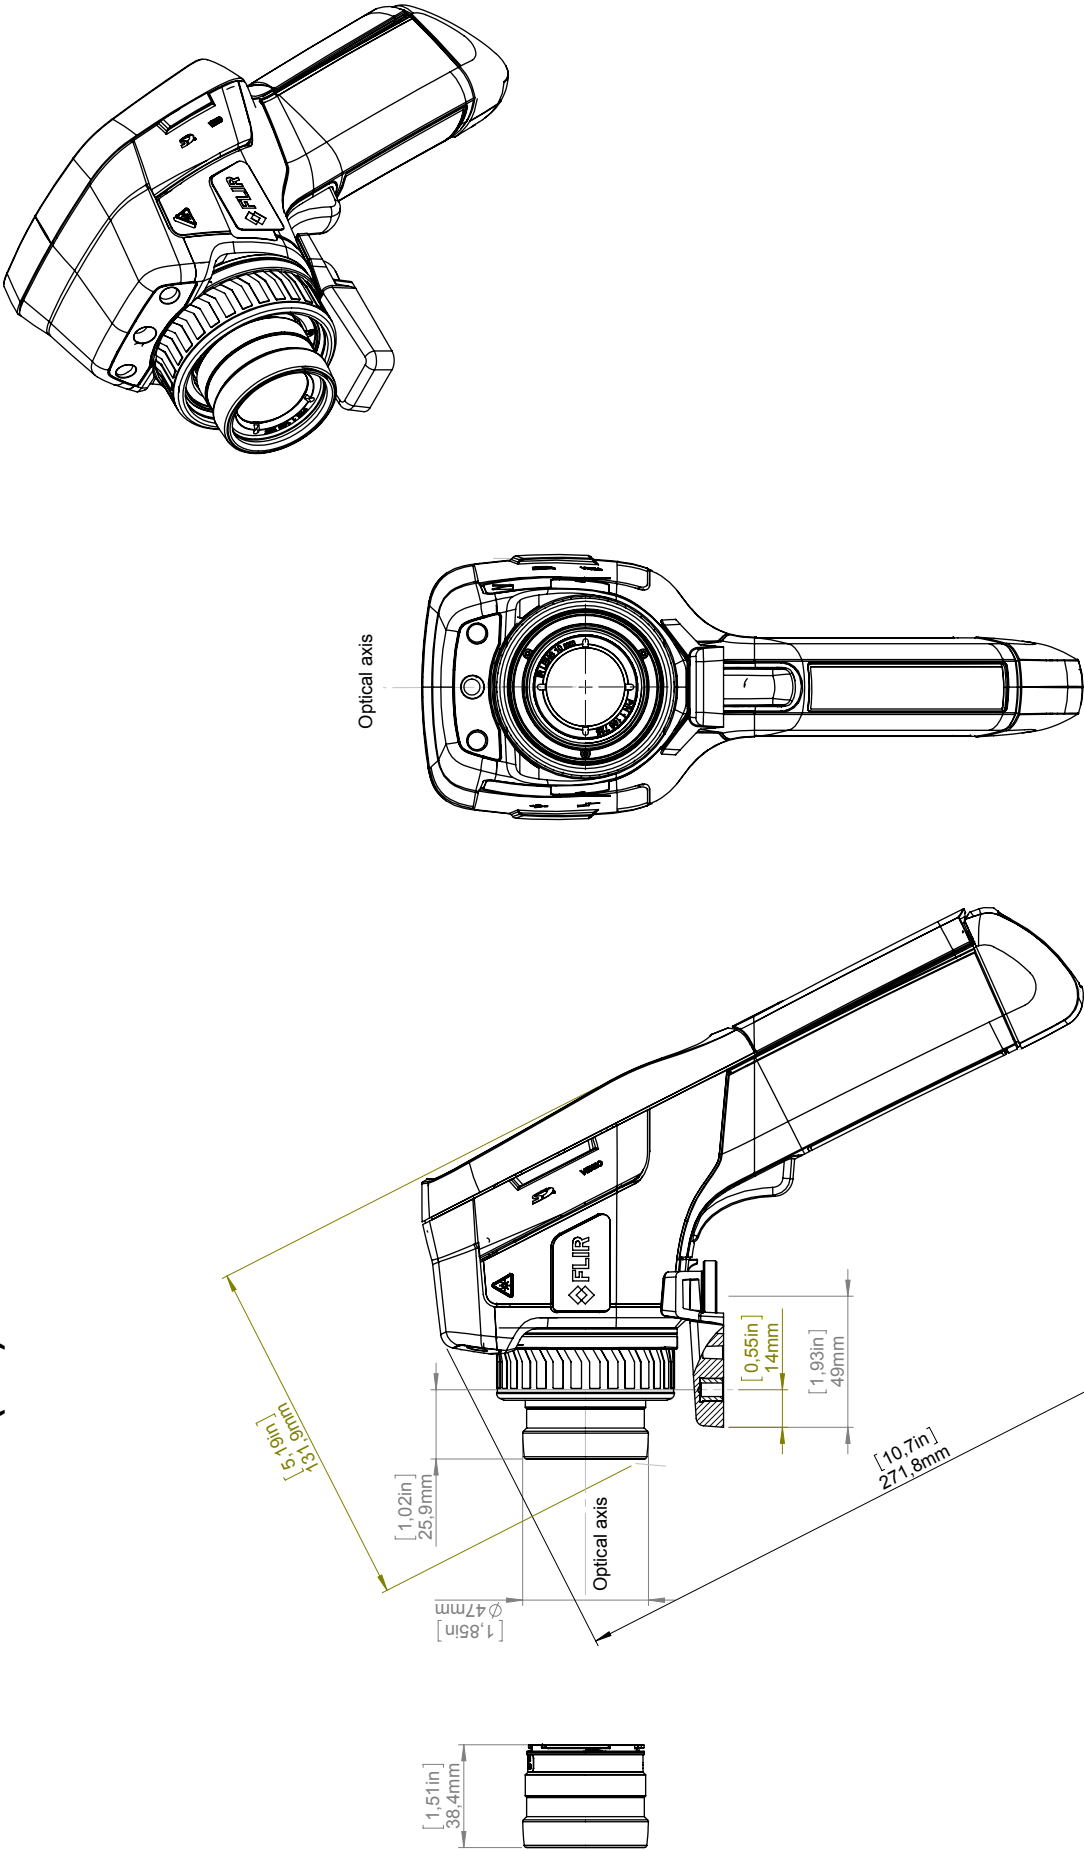

For additional dimensions see page 1			
Modified 2013-04-18	Check CAHA	Drawn by R&D Thermography	Size A3
Denomination Basic dimensions Flir Exx series			
Drawing No. T127869			Sheet 2(4)
Size A			Scale 1:2

**Camera with Lens IR f=30 mm (15°)**

Optical axis

Optical axis

Optical axis

Dimensions:

- Front view: 10.7 in (271.8 mm) total length, 1.48 in (37.6 mm) width, 0.46 in (11.7 mm) height, 0.95 in (24.3 mm) width, 1.93 in (49 mm) height, 0.55 in (14 mm) width.
- Side view: 1.93 in (49 mm) height, 0.55 in (14 mm) width.
- Top view: 0.95 in (24.3 mm) width, 0.46 in (11.7 mm) height.

For additional dimensions see page 1

Modified	Check	Drawn by	Size
2013-04-18	CAHA	R&D Thermography	A3
Denomination			Scale 1:2
			Sheet 3(4)
			Drawing No. T127869
			Size A

Basic dimensions Flir Exx series

For additional dimensions see page 1


Size . . .		

Scale	1:2	Sheet	3(4)
Drawing No.			

Drawing No.	T127869
Size	A



Camera with Lens IR f=76 mm (6°) incl support

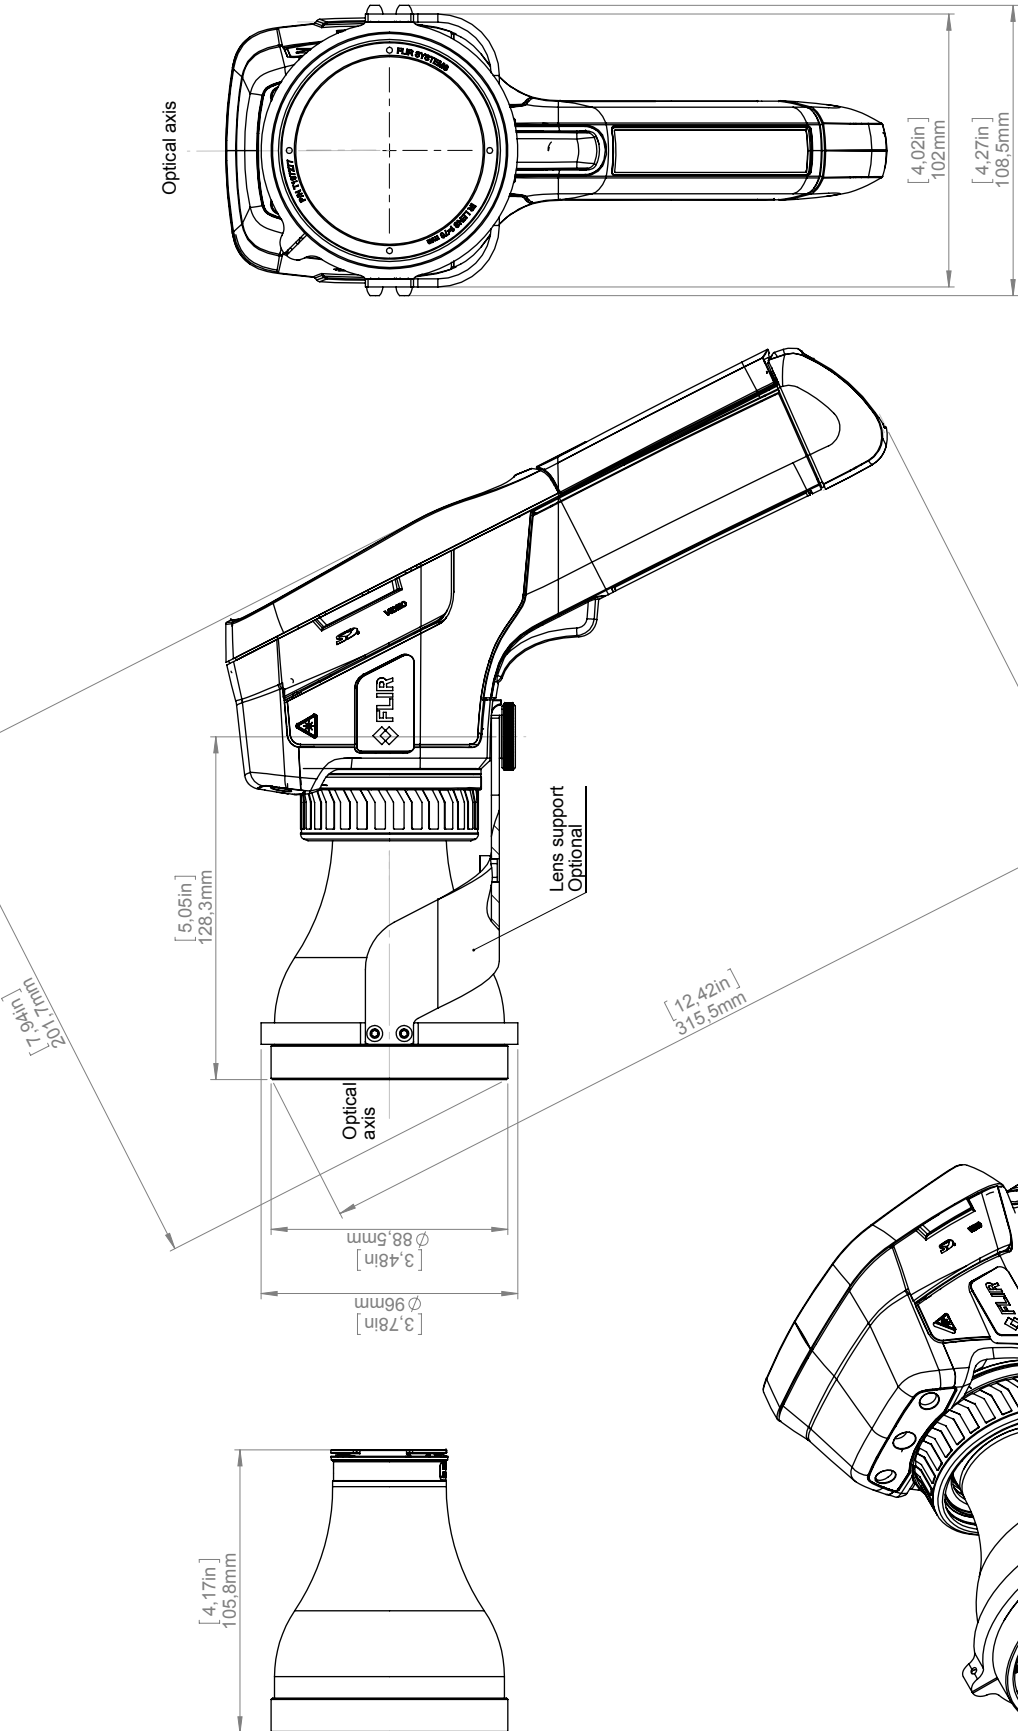

Modified 2013-04-18	Check CAHA	Drawn by R&D Thermography	For additional dimensions see page 1		
Denomination			Size A3	Sheet 4(4)	Size A
Basic dimensions Flir Exx series			Scale 1:2	Drawing No. T127869	

## CE Declaration of Conformity

This is to certify that the System listed below have been designed and manufactured to meet the requirements, as applicable, of the following EU-Directives and corresponding harmonising standards. The systems consequently meet the requirements for the CE-mark.

Directives:

<b>Directive 2004/108/EC</b>	<b>Electromagnetic Compatibility</b>
<b>Directive 2006/95/EC</b>	<b>“Low voltage Directive” (Power Supply)</b>
<b>Directive 1999/5/EC</b>	<b>“R&amp;TTE on radio equipment and telecommunications terminal equipment”</b>
<b>Directive 2002/96/EC</b>	<b>Waste electrical and electronic equipment; WEEE (As applicable)</b>

Standards:

<b>Emission:</b>	<b>EN 61000-6-3;    Electro magnetic Compatibility Generic standards - Emission</b>
<b>Immunity:</b>	<b>EN 61000-6-2;    Electro magnetic Compatibility Generic standards - Immunity</b>
<b>Safety (Power Supply):</b>	<b>EN 60950; (or other) Safety of information technology equipment</b>
<b>Radio</b>	<b>EN 300328 EN 301489</b>

System:                      **FLIR EXX series**

FLIR Systems AB  
Quality Assurance

Björn Svensson  
Director